





# Quick Start Guide



Tuya Smart Access Control



## 1 Product Description

### Product Appearance

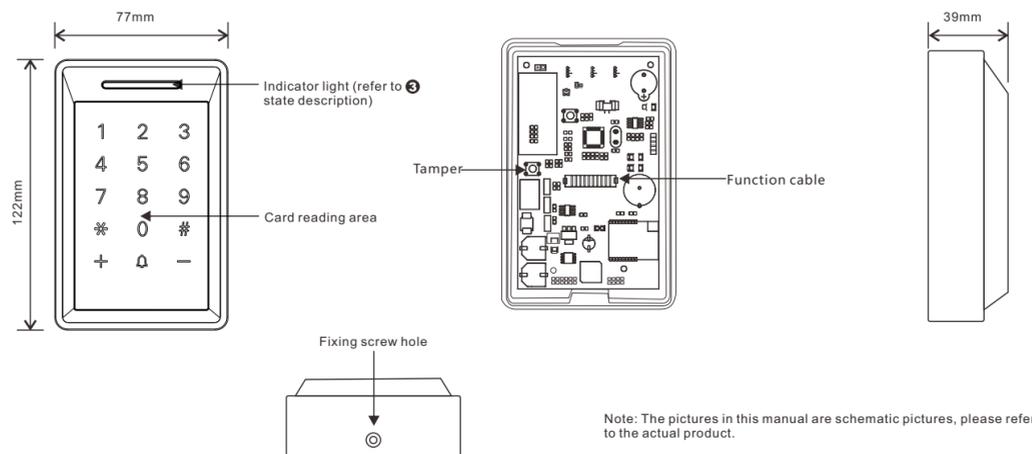

## Wall Mount

- Wall bracket, fixed on the wall with 4 screw holes.
- Align the holes on the back of the device with the hooks of the bracket, and fasten them on the mounting bracket from top to bottom.
- Fasten the device to the mounting bracket with the inner screws in the package.

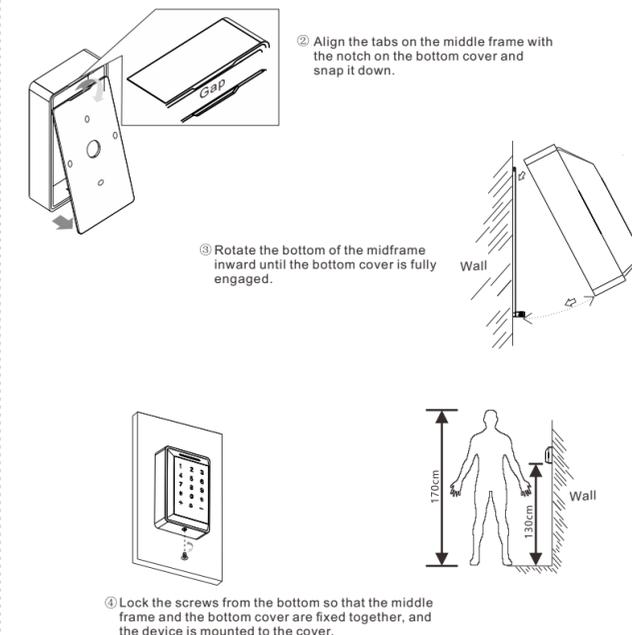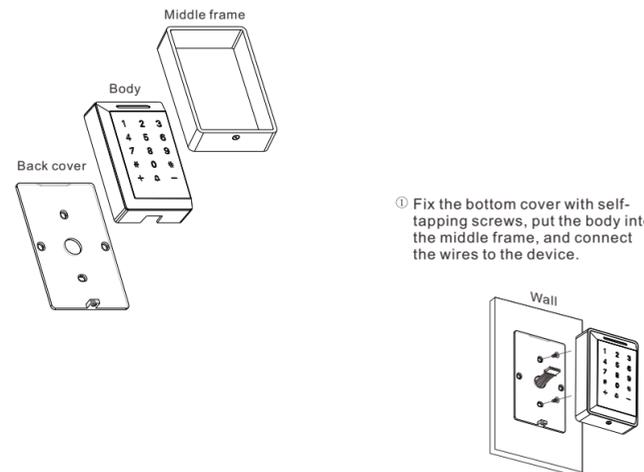

## 2 Parameter

Item	Parameter
Appearance Material	ABS, Aluminum alloy
Identification Type	Password or card (EM or Mifare card optional)
Network Connection	WiFi
Bluetooth Connection	Support
User Capacity	500 users
Open Door Mode	Support card, password, card or password, card + password
Keyboard	Touch keyboard
Remote Open	Support
Temporary Code	10 groups
Lock Control Output	1
Exit Button	1
Door Sensor Input	1
Input Protection	Lightning protection, surge protection
Output Protection	Spark suppression
Working Voltage / Current	DC12V±10% / <500mA(no load)
Working Environment	-20°C-60°C / 10%-90%
IP	IP63
Installation Method	Wall mount
Support Software	Tuya APP
Size	L122XW77XH39mm

## 3 Light Status


Indicator Color	Condition
Green	Device is starting
Blue	Device waiting to come online
Red	Device binding is successful

## Responsibility Statement

To the maximum extent permitted by law, the products described in this manual (including hardware, software, firmware, etc.) are provided as they are. There may be defects, errors, or malfunctions. This manual is for guidance only. The graphics, icons, and illustrations provided in the manual are for explanation and illustration only. There may be differences with specific products, please refer to the actual product. The company does not provide any form of express or implied guarantee, including but not limited to guarantees of marketability, quality satisfaction, suitability for specific purposes, and non-infringement of third-party rights, nor does it provide any special guarantees caused by the use of this manual or the company's products. Incidental, incidental or indirect damages, including but not limited to loss of business profits, loss of data or documents. If you connect products to the internet, you need to bear your own risks, including but not limited to, the product may suffer from hacker attacks, virus infections, network attacks, data leakage, etc. The company does not assume any major or related responsibility for product failure, abnormality, information leakage and other issues caused by this. However, the company will provide users with product-related technical support. When you use this product, you will collect, store, and use important personal information. As the data controller, when collecting, storing, and using personal information, please follow the relevant laws and regulations applicable to the protection of personal privacy. The company is not responsible for all personal and property losses caused by misuse of personal data. Please observe the laws and regulations of the place of use when using the product. If this product is used to infringe the rights of a third party or other improper purposes, the company will not bear any responsibility. If the content of this manual conflicts with applicable laws, the legal provisions shall prevail.

## For more details

## 4 Packing List

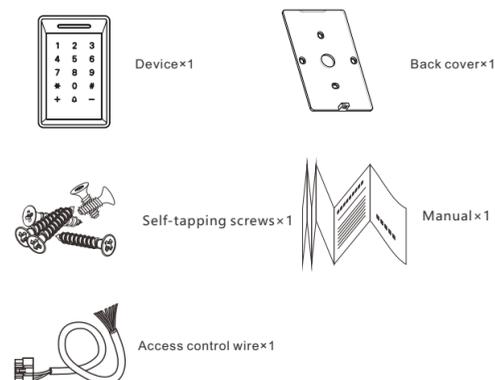


## 5 Access Control Wiring

### Warning:

- We recommend powering the lock and device separately.
- Please confirm the wiring is correct and then power on, do not operate with power on.
- Please strictly abide by the national and regional electrical safety regulations.
- Please contact your directed supplier when you need a after-sale service. Please don't disassemble or modify this product by yourself.

### Warning:

- Please read this manual carefully before starting the installation.
- To avoid heat accumulation, please install the device in a ventilated place, not in a place with heating equipment.
- Please mention to avoid moisture, strong electromagnetic environment, and outdoor exposed places.

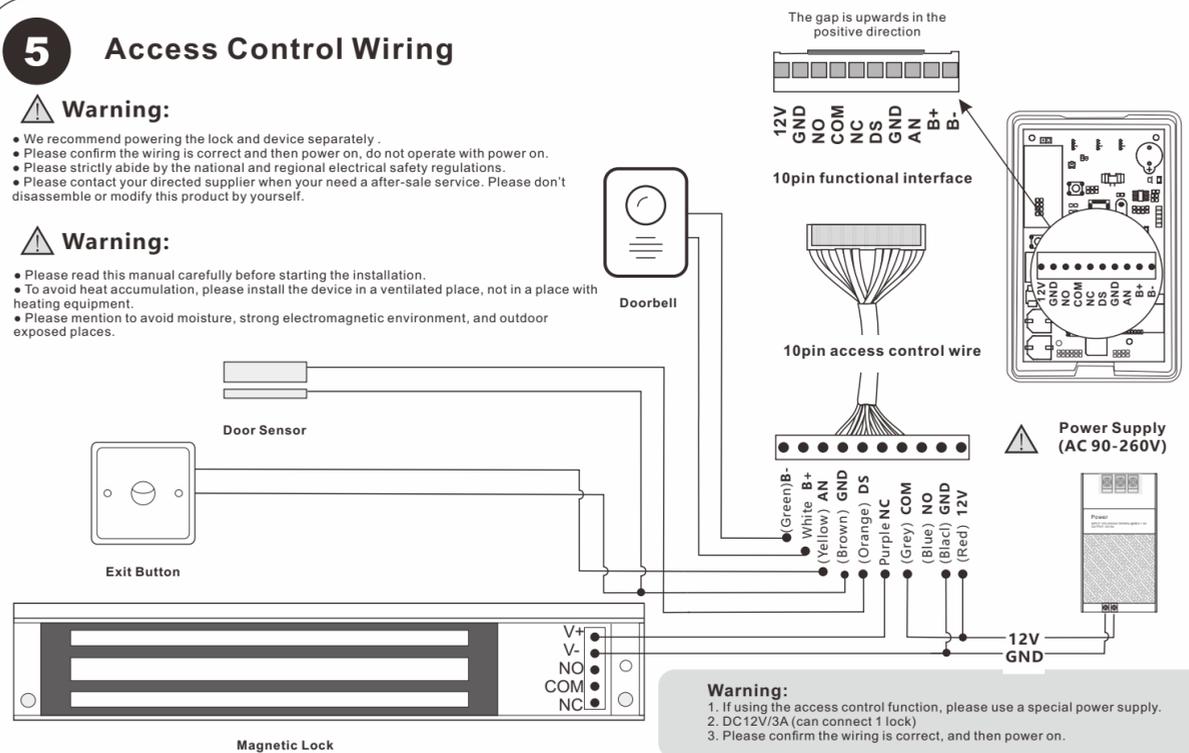

## 6 Mobile Software Installation

For Android or Apple phones, you can scan the QR code below to download directly through the browser, and install the Tuya APP software. You can also directly search for Tuya Smart in the APP store and install the software directly.




## 7 Preparation Before Use

Tuya APP requires permission to use Bluetooth. The wireless network connected to the phone and the wireless network used by the device should belong to the same network.




## 8.1 Search Device

Enter the home page and click the "Add Device" button.

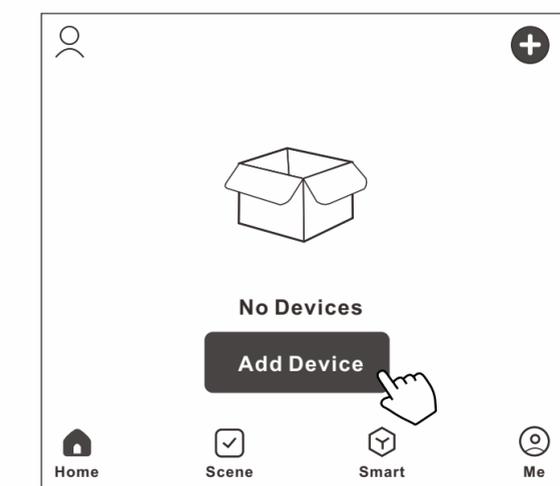




## 8.2 Search Device

After Bluetooth searches for the device, click "Add Device" to connect the device.

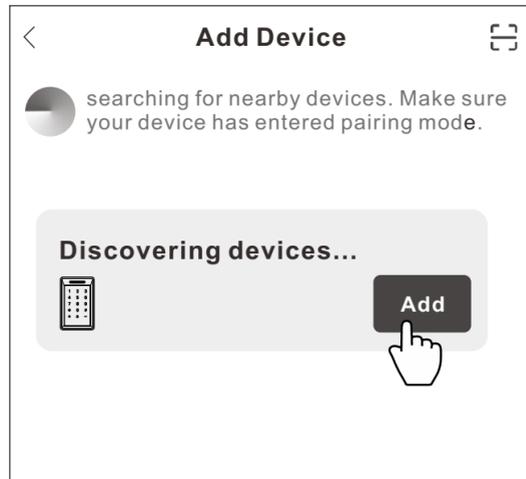


## 9 Device connect to WIFI

Enter the corresponding WiFi password, and then click the "Next" button to enter the next step.

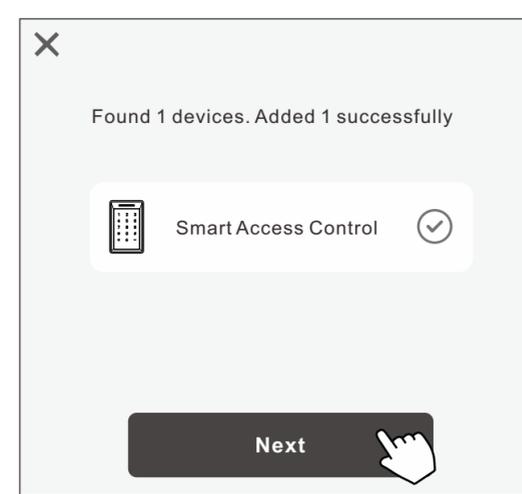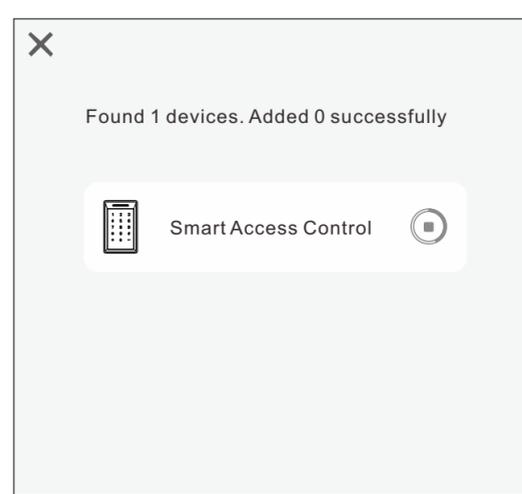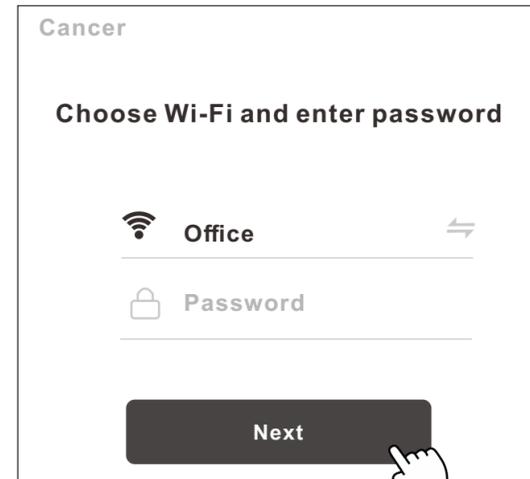


## 10 Add device

After the device WiFi setting is completed, directly add the device to the APP.

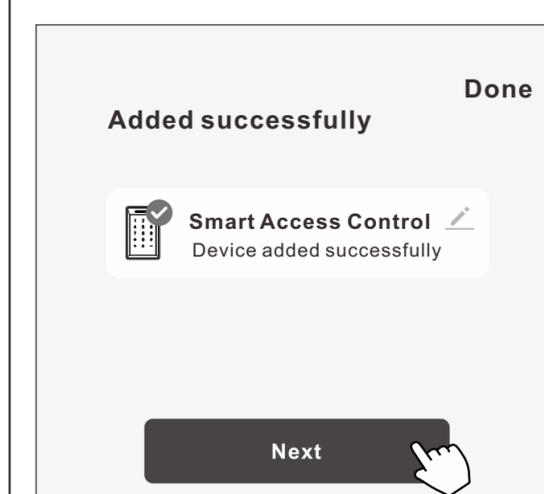


## 11.1 Remote Open

User can remote open door in this interface.

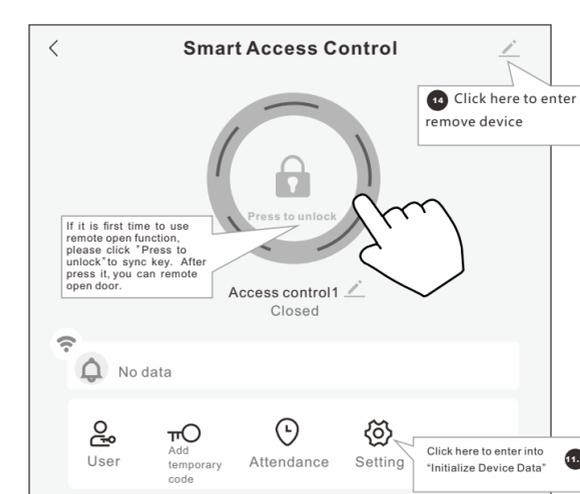


## 11.2 Setting

User can set basic parameter here. Note, if can not open door correctly, please check Multiple Verification setting, and confirm it is what you need setting. Please modify the setting according to following steps, after modify setting, APP will sync setting to device. If there is no special requirements, please set "Multiple Verification" as "Unlock by single mode", then close Multiple Verification.

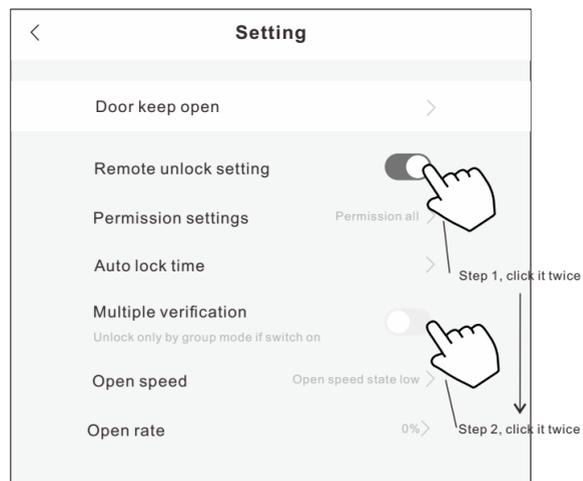


## 11.3 Set Auto Lock Time

This option is optional, and some versions of Tuya may do not have this option. The Auto lock time is at least 3s.

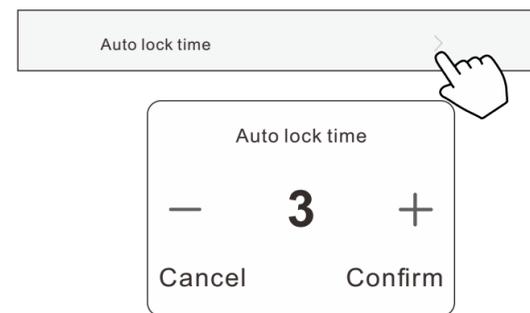


## 12 Set Temporary Code

10 groups of temporary codes can be set.

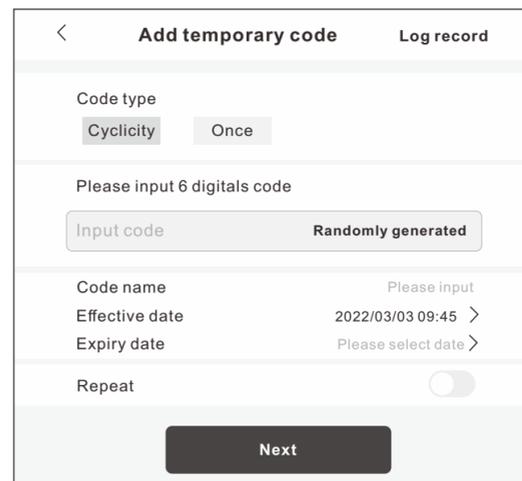

## 13 Add User

Only Administrator can add users, and administrator must register in Tuya APP.

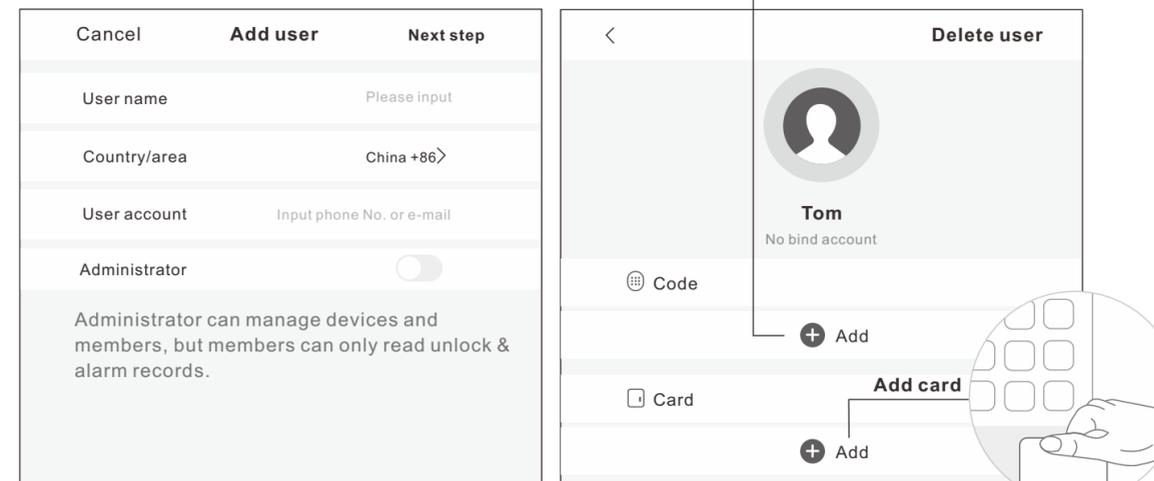

## 14 Remove Device

On the 11 interface, click "Remove Device", choose "Disconnect" or "Disconnect and Wipe data".

